

WIDEX DREAM™ MINI-BTE WITH **TRUEISP**


4 PERFORMANCE LEVELS 440/330/220/110



The WIDEX DREAM mini-BTE uses our unique wireless WidexLink technology and the new TRUE ISP, True-Input technology platform. Volume control and program button are standard. Uses a size 13 battery.

Minimal to severe hearing losses

SUGGESTED FITTING RANGE

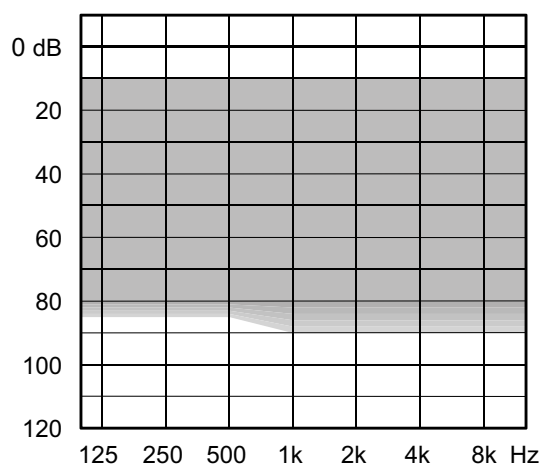

STANDARD TECHNOLOGY

- **TRUEISP**
- True-Input technology
- WidexLink - Wireless connectivity
- InterEar functionality
- Multiple earware options

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	5	3
TruSound Softener	X	X		
HD Locator/Locator	HD	HD	HD	X
Feedback cancelling (IE-InterEar)	IE	IE	IE	
Digital Pinna	X	X		
Speech Enhancer (IE-InterEar)	IE	X		
Personal Audibility Extender	X	X	X	X
Personal Acclimatisation	X	X	X	X
Number of programs*	5	4	3	2
Personal Zen	IE			
InterEar Partner Monitor	IE			
Phone+	X	X		
Reverse focus	X	X	X	
SmartSpeak/SmartTone	X	X	X	X

DEX ACCESSORIES	X	X	X	X
RC-DEX, TV-DEX, M-DEX, FM+DEX, PHONE-DEX ¹ , T-DEX ²				


* Plus Zen+

¹ Available in Europe

² Available in Europe and US/CA/NZ/AUS


MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0

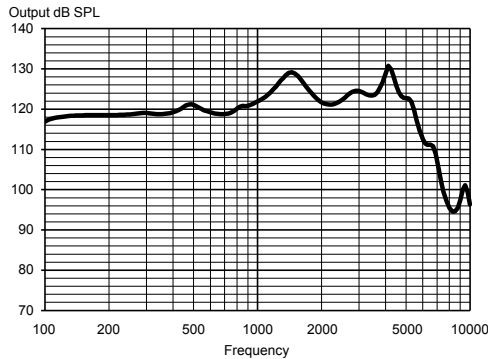


MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

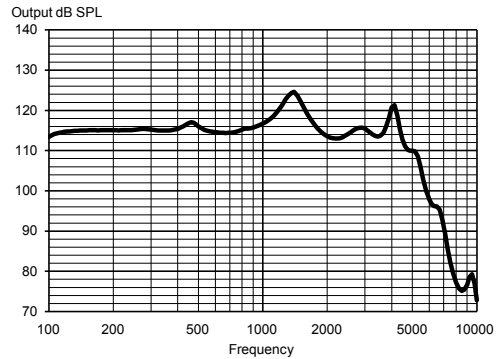


OUTPUT - EAR SIMULATOR

IEC 60118-0

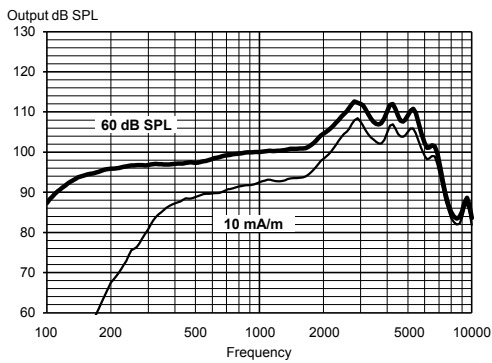

OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

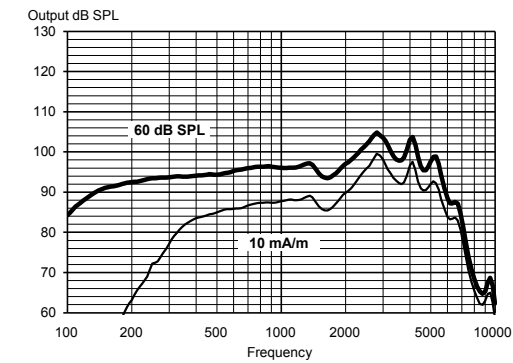

Technical data Typical data obtained through standard pure tone measurements.
Hearing aid set to Compass Test mode 1, unless stated otherwise.
Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	122 dB SPL	114 dB SPL
	Peak	131 dB SPL	124 dB SPL
	Average	122 dB SPL	117 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	109 dB SPL	102 dB SPL
	Peak	113 dB SPL	105 dB SPL
	Average	101 dB SPL	97 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	65 dB	57 dB
	Peak	68 dB	61 dB
	Average	58 dB	52 dB
Telecoil output (Input 10 mA/m)	2500 Hz	102 dB SPL	94 dB SPL
	Peak	106 dB SPL	98 dB SPL
	Average	91 dB SPL	88 dB SPL
Frequency range		100 Hz - 8000 Hz	100 Hz - 7300 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		22 dB SPL	25 dB SPL
Battery drain (stand by)		0.89 mA	0.89 mA
Battery drain		0.9 mA	0.91 mA
Battery life / hours (Type 13 Zn-Air, 270 mAh)		300 (>270)	295 (>265)
Mobile phone immunity		IRIL: -32/-30 dB SPL	U-rating: M4 / T3

