


Mojo MINI RIC RECHARGEABLE (V.2 RIC M-RECEIVER)

Minimal to severe hearing losses
M7/M6/M5/M4/M3



Fitting range

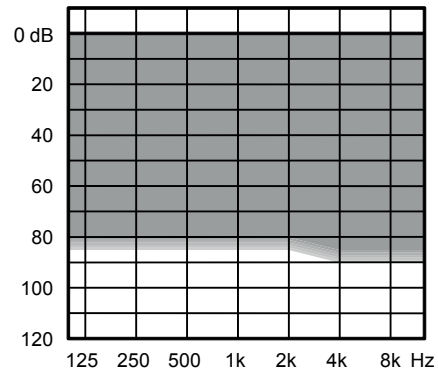

Key Features	M7	M6	M5	M4	M3
Processing and fine-tuning channels	15	12	10	6	6
In-Situ Sound Optimisation	•	•	•	•	•
Experience Level Manager	•	•	•	•	•
Programs	5	4	3	3	3
Automatic Adaptive Directionality channels	15	12	10	6	6
Volume Control II*	•	•	•	•	•
Programmable Push Button**	•	•	•	•	•
Ambient Noise Rejection II	•	•	•	•	•
Noise reduction	•	•	•	•	•
Preference Log	•	•	•	•	•
Linked ZEN	•	•	•	•	•
Linear Frequency Transposition	•	•	•	•	•
Acoustic Situation Technology	11 (Linked)	7 (Linked)	4	3	
Impulse Noise Rejection II	•	•	•		
Automatic Adaptive Directionality	•	•	•		
Speech Enhancer II	II/Linked	Linked			
Real Ear Effect	•	•			
Wind Noise Control II	•				
High-frequency boost	•				
Connectivity					
2.4 GHz control (Android and iOS)	•	•	•	•	•
2.4 GHz audio streaming (iOS)	•	•	•	•	•
DEX assistive listening device compatibility	•	•	•	•	•
Accessories					
Mojo App	•	•	•	•	•
Acoustic remote control App	•	•	•	•	•
COM-DEX App	•	•	•	•	•

*Via DEX and app **Programmable: Volume control II, program shift or a combination of the two

Colours


114/Honey Blonde, 115/Chestnut Brown, 118/Tech Black, 119/Silver Grey, 120/Golden Brown, 121/Titanium Grey, 123/Autumn Beige

TECHNICAL DATA


		EAR SIMULATOR IEC 60118-0:1983, + A1:1994	2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	122 dB SPL 128 dB SPL 120 dB SPL	113 dB SPL 117 dB SPL 114 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	107 dB SPL 114 dB SPL 100 dB SPL	98 dB SPL 103 dB SPL 97 dB SPL
Full-on gain (Input 50 dB SPL)	1600 Hz Peak Average	67 dB SPL 69 dB SPL 64 dB SPL	58 dB SPL 61 dB SPL 57 dB SPL
Acoustic Frequency range		100 Hz - 10000 Hz	100 Hz - 9200 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		19 dB SPL	20 dB SPL
Battery current (stand by)		1.18 mA	1.18 mA
Battery current		1.25 mA	1.28 mA
Battery life / hours (Type 312 Zn-Air, 170 mAh)*		40 h	40 h
Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011)		IRIL: -29/-26/-8 dB SPL	U-rating: M4

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.


MAXIMUM OUTPUT - EAR SIMULATOR

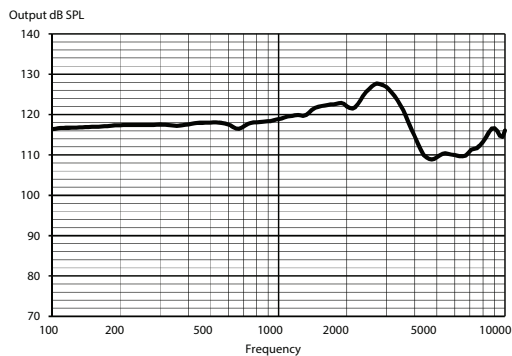

MAXIMUM OUTPUT - 2CC COUPLER

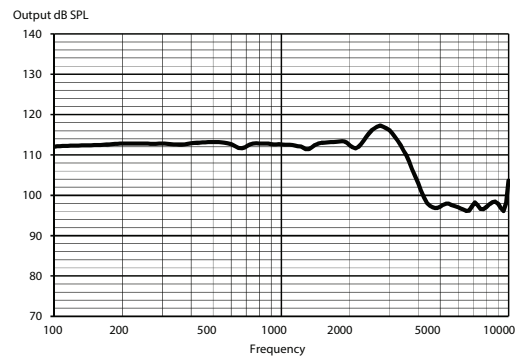

OUTPUT - EAR SIMULATOR

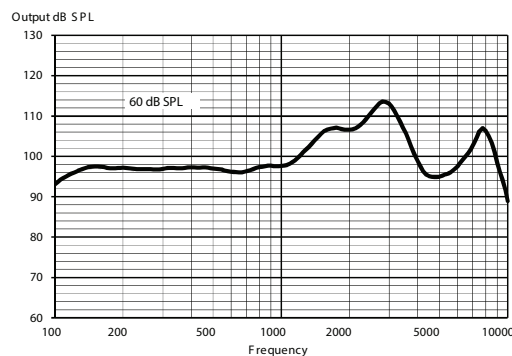

OUTPUT - 2CC COUPLER

